

# **120W Solar panel specifications**

Our range of solar panels are constructed from ultra-efficient polycrystalline and have been designed to provide a reliable and cost-effective alternative energy solution for applications where mains power is either not available, or not desirable.


#### **Main features:**


- Clever engineering makes for minimal power losses during prolonged periods in shade
- Fully weather-resistant durable white tempered glass, EVA resin and weather-resistant film enclosed in anodised aluminium frame


#### **Technical specifications**

Type Of Module	120W
Maximum Power	120W
Tolerance	± 3%
Open Circuit Voltage	22V
Short Circuit Current	7,06A
Maximum Power Voltage	18V
Maximum Power Current	6,67A
Module Efficiency	14,8%
Solar Cell Efficiency	17,05%
Series Fuse Rating	15A
Terminal Box	IP65
Maximum system voltage	1000V DC
Operating Temperature	-40°C - 85°C
Dimensions	1210mm x 670mm x 35mm
Weight	10kg
·	


## **Physical dimensions**

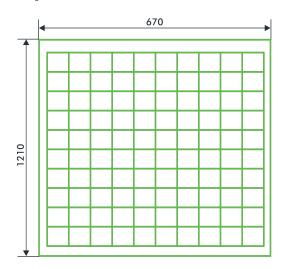



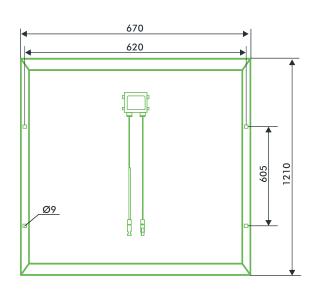

## Current-voltage and power-volatge characteristics - various irradiance levels

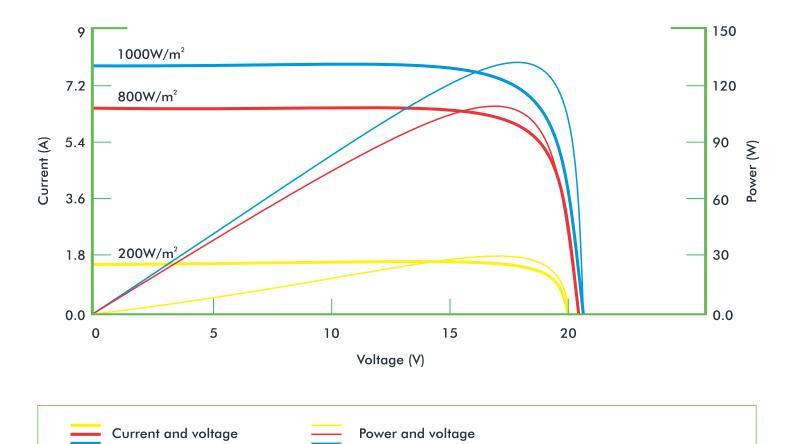

## **Electrical characteristics**

Electric performance typical performance characteristics		
Current Temperature Coefficient %/°C	+0.06	
Voltage Temperature Coefficient %/°C	-0.34	
Power Temperature Coefficient %/°C	-0.47	
Performance Warranty: 90%output, 12 year 80%output, 25 years		